



R (max) m	H1 m	R (min) m	H2 m	Rfs m
50	17,6	5,2	54,2	22
45	16,3	4,8	49,1	20
40	15,1	4,5	44,1	19
35	13,7	4,1	39,0	19
30	10,0	3,7	32,9	19

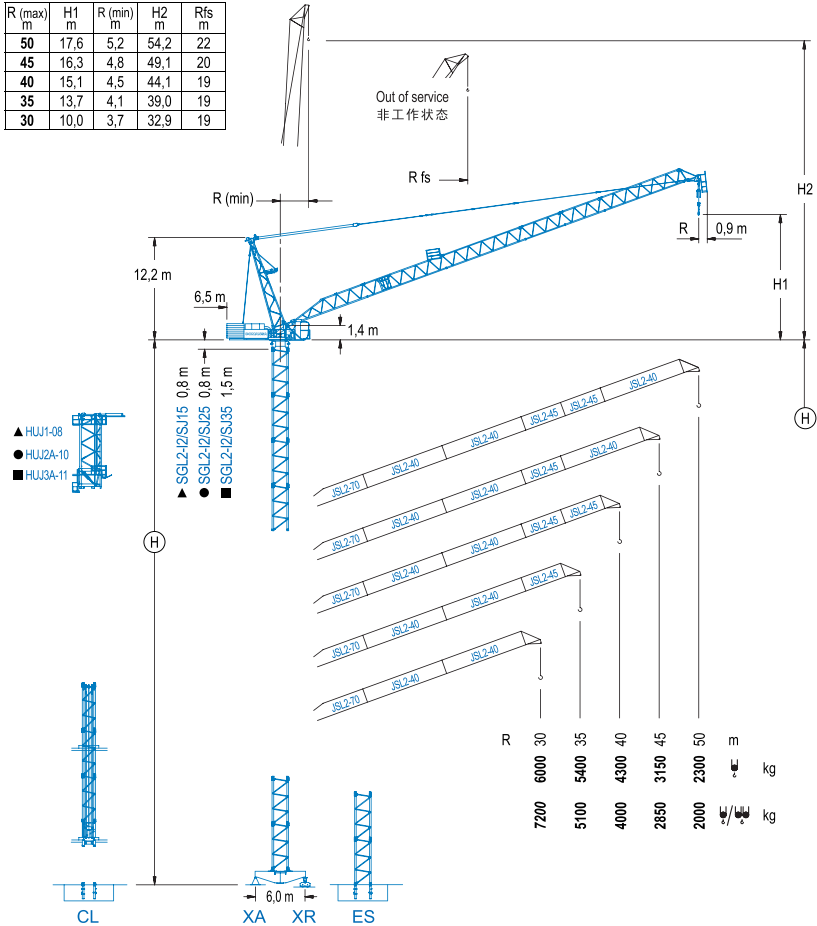


Load Chart / 载荷曲线

R (m)	$\frac{W}{W_0}$	RCmax (m)	10	15	20	25	30	35	40	45	50	$\frac{C_2(m)}{C_1(kg)}$
50		28,4				6000	5480	4250	3410	2790	2300	
45		29,5				6000	5850	4650	3800	3150		
40		30,9					6000	5120	4300			
35		31,9					6000	5400				
30		30,0					6000					









R (m)	$\frac{W}{W_0}$	RCmax (m)	10	15	20	25	30	35	40	45	50	$\frac{C_2(m)}{C_1(kg)}$
50		11,8	12000	9000	6380	4880	3900	3210	2700	2310	2000	
45		13,3	12000	10460	7520	5810	4680	3890	3300	2850		
40		14,6	12000	11660	8590	6750	5520	4650	4000			
35		15,9		12000	9390	7380	6040	5100				
30		16,8		12000	10290	8430	7200					



Valid data up to 80 m of tower height. Additional heights on request.
此数据仅适用于塔机高度80m以下，其他高度请咨询。


Mechanisms / 机构



POWER / 功率				Operating voltage / 工作电压	Required power 需要功率
Hoist / 起升机构	Luffing / 仰臂机构	Slewing / 回转机构	Travel / 行走机构		
HFU2-45-30	LFU2-45-40	(2x) SFU-7.5	(2x) RT-7.5	400 V	180 kVA
HFU2-65-30				3ph 50 Hz	220 kVA

Optional
选项

FEM 1.001

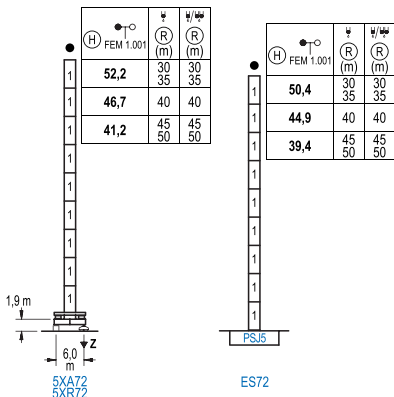


n°	Ref.	∅	h
1	SJ25	2,0	5,5

1xSJ25=1xSJ25M

R max. 最大压力	In operation 工作状态	5XR72.....97 t
	Out of service 非工作状态	5XR72.....129 t

FEM 1.001

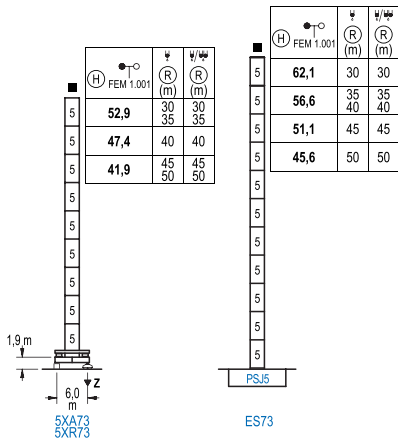


n°	Ref.	∅	h
5	SJ35	2,5	5,5

R max. 最大压力	In operation 工作状态	5XR73.....96 t
	Out of service 非工作状态	5XR73.....124 t

Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询


FEM 1.001



5XA72				
R	ψ	ψ/ψ	ψ	ψ/ψ
50 / 45	40	35 / 30		
(m)	(m)	(m)		
A max	29,4	34,9	40,4	
A min	23,9	23,9	23,9	
B max	-	22,0	-	27,5
B min	-	16,5	-	16,5
C max	33,8	33,8	33,8	39,3
H max	63,2	85,2	68,7	90,7

ES72				
R	ψ	ψ/ψ	ψ	ψ/ψ
50 / 45	40	35 / 30		
(m)	(m)	(m)		
A max	27,6	33,1	38,6	
A min	22,1	22,1	22,1	
B max	-	22,0	-	27,5
B min	-	16,5	-	16,5
C max	33,8	33,8	33,8	39,3
H max	61,4	83,4	66,9	88,9

FEM 1.001




5XA73				
R	ψ	ψ/ψ	ψ	ψ/ψ
50 / 45	40	35 / 30		
(m)	(m)	(m)		
A max	29,4	34,9	40,4	
A min	23,9	23,9	23,9	
B max	-	22,0	-	27,5
B min	-	16,5	-	16,5
C max	34,5	34,5	34,5	40,0
H max	63,9	85,9	69,4	91,4


ES73				
R	ψ	ψ/ψ	ψ	ψ/ψ
50	45	40 / 35	30	
(m)	(m)	(m)	(m)	
A max	33,1	38,6	44,1	49,6
A min	22,1	22,1	22,1	22,1
B max	-	22,0	-	33,0
B min	-	16,5	-	16,5
C max	34,5	34,5	40,0	45,5
H max	67,6	89,6	78,6	100,6

LCL Series

FEM 1.001



(H) FEM 1.001	ψ (R)(m)	ψ/ψ (R)(m)	Hs < 600 m	A max (m)	A min (m)
44,4 (SJ15-2+ 7xSJ15+ CLSJ15-08)	30 / 35	30 / 35	19,6	13,0	
42,4 (7xSJ15+ CLSJ15-08)	40		16,8	13,0	
40,9 (2xSJ15-2+ 6xSJ15+ CLSJ15-08)		40	16,8	12,0	
38,9 (SJ15-2+ 6xSJ15+ CLSJ15-08)	45		14,1	12,0	
36,9 (6xSJ15+ CLSJ15-08)		45	14,1	12,0	
35,4 (2xSJ15-2+ 5xSJ15+ CLSJ15-08)	50		14,1	12,0	
31,4 (5xSJ15+ CLSJ15-08)		50	14,1	11,0	



Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询